
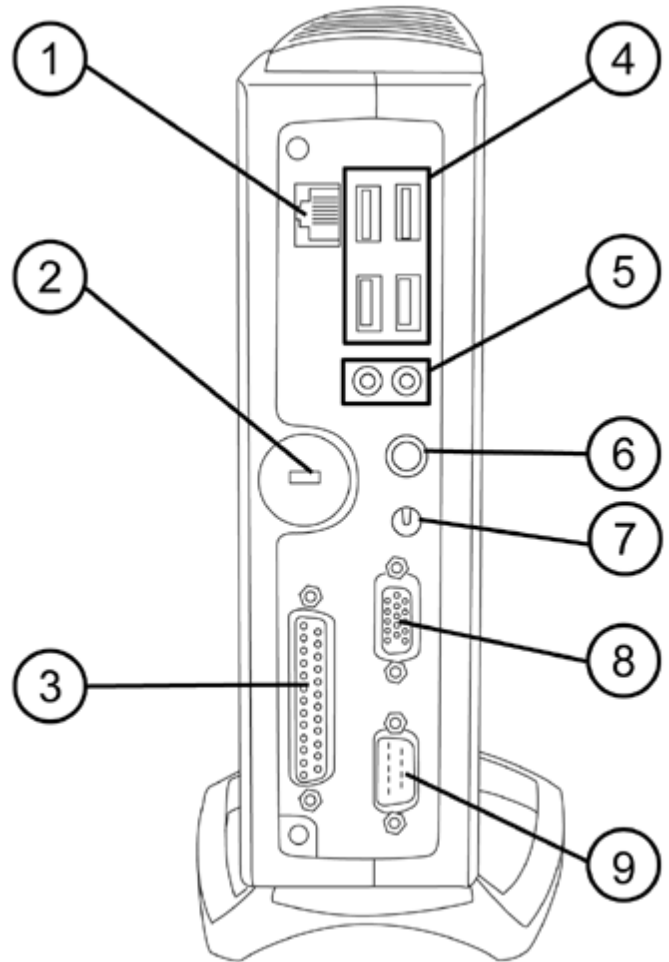


Overview

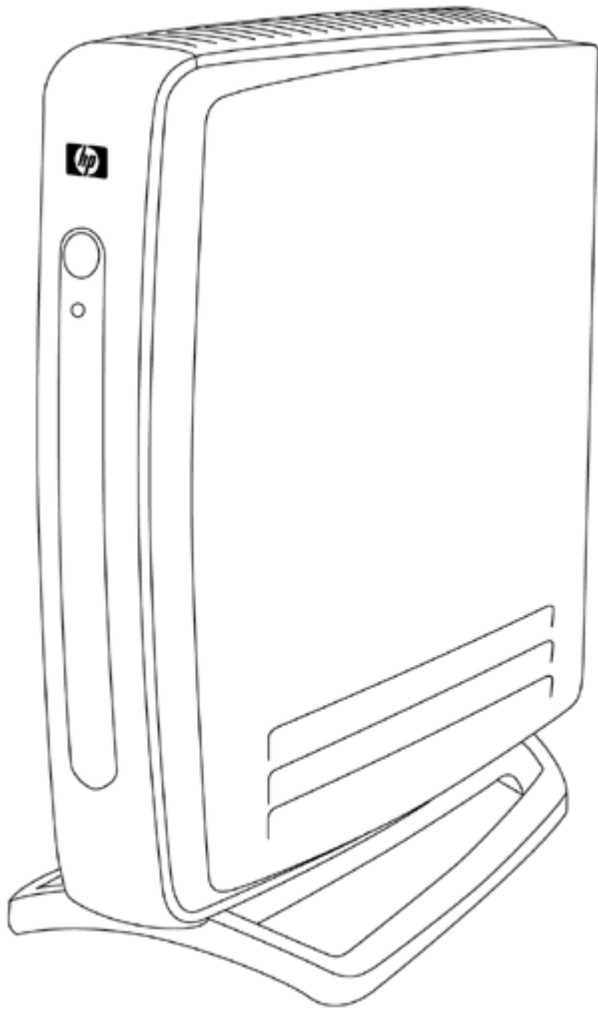

1. 10/100 RJ-45
2. Security lock
3. Parallel Connector
4. USB Connectors
5. Audio connector (mic in/line out)

6. PS/2 Connector
7. DC Power Input
8. Video Connector
9. Serial Connector

Overview

At A Glance

- Enhanced features for mainstream business use
- Simple, more secure manageability for the enterprise with Altiris Deployment Solution
- Helps lower ownership costs and increase resource efficiency for each end-user
- Linux operating system
- 800-MHz processor
- 256 MB Flash memory
- 128 MB DDR SDRAM standard (**NOTE: 16 MB of system RAM is reserved for video graphics usage**)
- Legacy support includes parallel, serial and PS/2 connections along with four USB 2.0 ports
- Support for selected options and peripherals
- Protected by Hewlett-Packard Services, including a limited three-year hardware warranty – certain restrictions and exclusions apply

Standard Features - Models

EA723AA#ABA /
EA723AT#ABA

Processor	VIA Eden 800 MHz
Flash	256 MB
Memory	128 MB DDR SDRAM <i>(NOTE: 16 MB of system RAM is reserved for video graphics usage)</i>
USB support	2.0
Operating System	Linux kernel 2.4
Browser	Firefox 1.x with Java
Client Management Software	Altiris Deployment Solution

Options

For a complete list of options and peripherals, please see the [Thin Clients Options & Accessories](#) area on hp.com.

Care Packs*	9x5 Next-Business-Day Advanced Exchange – 3 Years	331653-001; U4847E
	9x5 Next-Business-Day On-Site Coverage – 3 Years	331655-001; U4849E

*U4847E is available in all regions; U4849E is available in Americas and Asia-Pacific/Japan.

**The warranties for HP or Compaq branded products are set forth in the express limited warranty statements accompanying such products. Although these third-party products may work effectively on HP or Compaq thin clients, HP does not support or warrant third-party products, including the interoperability of such products with HP or Compaq thin clients. However, third-party manufacturers and vendors may provide their own warranties and support directly to you. Please contact the manufacturers and vendors listed previously for support on their products.

Technical Specifications

Processor	VIA Eden 800 MHz		
Memory	Flash	256 MB	
	System Memory	128 MB of DDR SDRAM (NOTE: 16 MB of system RAM is reserved for video graphics usage)	
Graphics	Mode	Refresh Rates	Color Depth
	640 x 480	60, 75, or 85 Hz	8-, 16-, or 24-bit
	800 x 600	60, 75, or 85 Hz	8-, 16-, or 24-bit
	1024 x 768	60, 75, or 85 Hz	8-, 16-, or 24-bit
Input/Output/ Peripheral Support	Keyboard	USB (keyboard included), PS/2	
	Mouse	USB (mouse included), PS/2	
	Printer	Local and/or network printers (RDP, ICA, LPD, JetCET)	
	Video	VGA-type video output (DB-15)	
Audio	Output	Internal amplified speaker, 1/8-inch mini, full 16-bit stereo, 44-kHz sample rate	
Security	Security lock slot (cable lock sold separately)		
Server-based computing protocols	Citrix ICA and rdesktop for remote server access, X-terminal		
Networking	TCP/IP with Dynamic DNS and DHCP support		
	10/100 BaseT Fast Ethernet, twisted pair (RJ-45)		
	Direct Connection through Point-to-Point Protocol (PPP), Point-to-Point over Ethernet (PPPoE), VPN Connection through MS Point-to-Point Tunneling Protocol (PPTP), Layer-2 Tunneling Protocol (L2TP)		
	Wake on LAN, PXE		
I/O ports and connectors	Four USB 2.0 ports, 1 serial, 1 parallel, 1 PS/2		
Resident Operating System	Linux kernel 2.4		
Server OS Compatibility/Support	Microsoft® Windows® NT Server 4.0 family, Microsoft Windows 2003 Server family, Microsoft Windows 2000 Server family (except data center addition); Microsoft Windows 2003 Server Terminal Services, Citrix Presentation Server, Linux, and Unix		
Software Included	Linux 2.4		
	Firefox 1.x browser with Sun Java , Adobe Acrobat Reader , Citrix ICA, rdesktop RDP client, SSH, HP Connection Administrator, and VNC		
	Metrowerks supports the HP Compaq t5525 with a Board Support Package designed for use with Metrowerks Platform Creation Suite to allow more extensive image customizations. See http://www.metrowerks.com/MW/Develop/Embedded/Linux/hpthinclient.htm		
	Altiris Deployment Solution (client agent) preinstalled. Altiris Deployment Solution (management console) available as free download from Altiris at: http://www.altiris.com/hptc		
Languages	English		
Dimensions H x W x D (approximate)	Without stand	2.2 x 8.2 x 7.8 in (55 x 205 x 195 mm)	
	With stand	9.2 x 4 x 7.8 in (230 x 100 x 195 mm)	
Weight (approximate)	With stand	3.10 lb (1.41 kg)	

Technical Specifications

Environmental	Temperature range on	50° to 104° F (10° to 40° C)
	Temperature range off	-22° to 140° F (-30° to 60° C)
	Humidity	20% to 80% condensing/10% to 95% non-condensing
	Power	Worldwide auto-sensing 100-240 VAC, 50-60 Hz energy-saving automatic power-down
Regulatory Compliance	Ergonomics	German ZH1/618; EN29241-3, approved
	Safety	UL 1950, CSA 950; TÜV-GS (EN60 950) approved
	RF Interference	FCC Class B; CE Mark; EN55022B; VCCI
Warranty	Three-year limited hardware warranty. The software is comprised of open source community code, third-party licensed code, and HP code and is provided without warranty. NOTE: Certain restrictions apply. Consult the HP Customer Support Center for details.	

©Copyright 2006 Hewlett-Packard Development Company, L.P.

Microsoft, Windows, and Windows NT are trademarks and/or registered trademarks of Microsoft Corporation in the United States and other countries.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products and services are set forth in the express limited warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.