
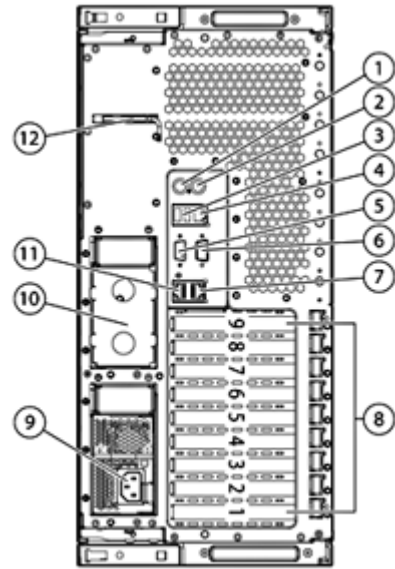


Overview

HP ProLiant ML370 G5 Model (tower)

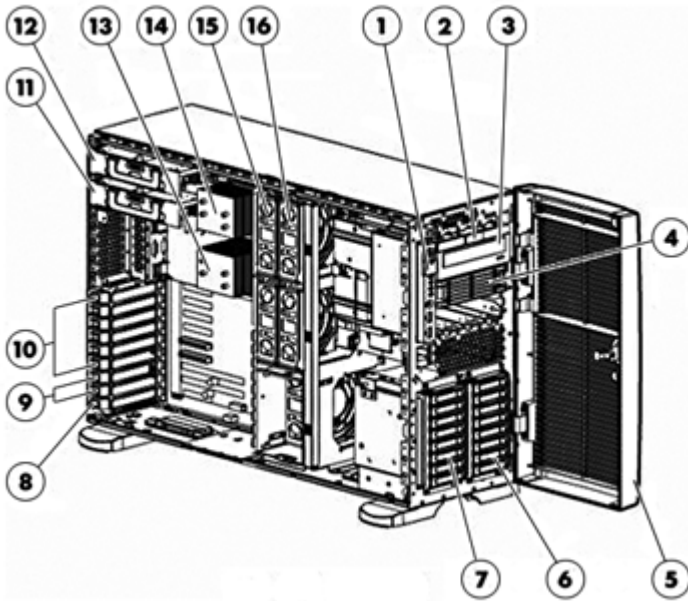

Front View:


1. System Insight Display (SID)
2. Media Bay Spacer (Tower)/Video Connector (Rack)
3. DVD-ROM Drive
4. Removable Media Bays
5. Front Bezel (Tower Model Only)
6. Hard Drive Bays 1-8 (Serial-attached SCSI (SAS) drives supported - SFF)
7. Hard Drive Bays 9-16 - Optional Drive Cage (Serial-attached SCSI (SAS) drives supported - SFF)
8. Integrated RAID Controller Slot
9. (2) PCI-X 64 Bit/133MHz Slot
10. (6) PCI-Express x4 Slot
11. (8) PC2-5300 Fully Buffered DIMM Slots per memory card - Standard
12. (8) PC2-5300 Fully Buffered DIMM Slots per memory card - Optional
13. Dual-Core Intel Xeon processor - Optional
14. Dual-Core Intel Xeon processor - Standard (2 processors standard on all Performance Models)
15. (3) Hot Plug Redundant Fans - Standard
16. (3) Hot Plug Redundant Fans - Optional

Rear View:

1. Keyboard connector
2. Mouse connector
3. USB connectors
4. Integrated Lights-Out 2 (iLO 2) management connector
5. Video connector
6. Serial connector
7. NIC 2 connector
8. PCI expansion slots
9. Hot-plug power supply (primary bay)
10. Hot-plug power supply blank (redundant bay)
11. NIC 1 connector
12. T-15 Torx screwdriver


Overview

HP ProLiant ML370 G5 Model (Rack)

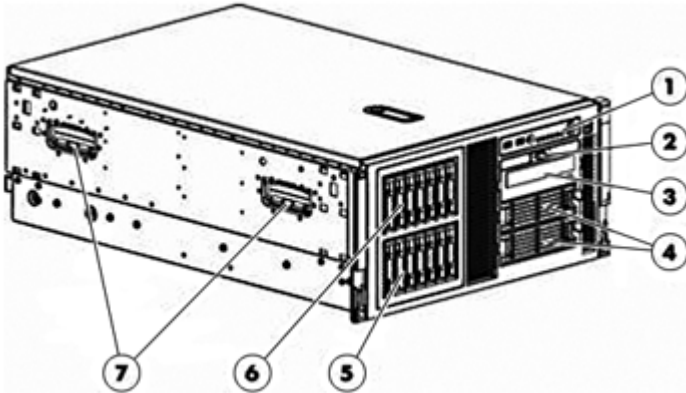

Front View:

1. System Insight Display (SID)
2. Video Connector
3. DVD/CD-ROM Drive
4. Removable Media Bays
5. Hard Drive Bays 1-8 (Serial-attached SCSI (SAS) drives supported - SFF)
6. Hard Drive Bays 9-16 - Optional Drive Cage (Serial-attached SCSI (SAS) drives supported - SFF)
7. Rack Handles

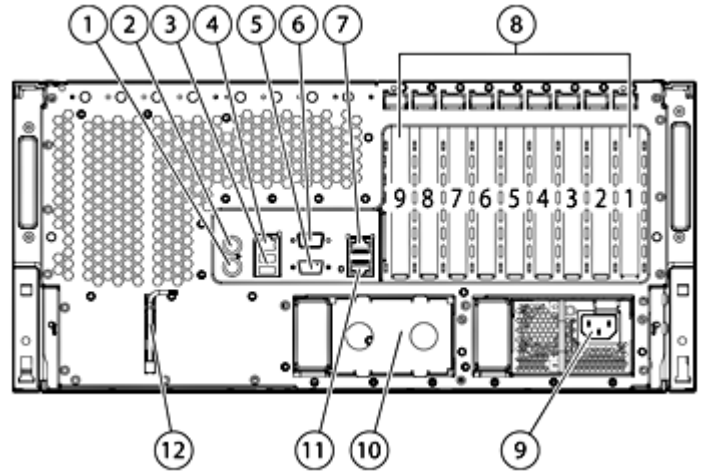

Rear View:

1. Keyboard connector
2. Mouse connector
3. USB connectors
4. Integrated Lights-Out 2 (iLO 2) management connector
5. Video connector
6. Serial connector
7. NIC 2 connector
8. PCI expansion slots
9. Hot-plug power supply (primary bay)
10. Hot-plug power supply blank (redundant bay)
11. NIC 1 connector
12. T-15 Torx screwdriver

What's New

- Support for:
 - HP 500GB 6G SAS 7.2K SFF DP MDL HDD
 - HP 500GB 3G SATA 7.2K 2.5in MDL HDD
 - HP 160GB 3G SATA 7.2K 2.5in MDL HDD

At A Glance

The flagship ML370 G5 provides industry-leading management, performance and availability in a dual processor expansion server engineered to excel in a variety of environments - from corporate work groups in growing businesses to critical remote sites requiring continuous accessibility and uptime.

- **Processors:**
 - Quad-core Intel® Xeon® 5400 sequence processors with 12MB Level 2 cache (6MB per die) for blazing performance
 - Servers support up to 2 processors (2 processors standard on all Performance models)

Overview

- Preconfigured Performance models save valuable deployment time at a discounted bundle price
- Intel® 5000P chipset
- **Memory:**
 - Maximum 64 GB of PC2-5300 Fully Buffered DIMMs (DDR2-667) running at 667MHz of 4:1 interleaved memory with Advanced ECC capabilities including Online Spare and Mirrored Memory (8 FB DIMMs per memory card; up to 2 supported)
 - NOTE: Memory DIMMs in systems with the Front Side Bus (FSB) running at 1333 MHz will run at 667 MHz and in systems with a FSB running at 1066 MHz or 667 MHz the memory DIMMs will run at 533 MHz.
- **Storage Controller:**
 - Base Models: HP Smart Array P400/256MB Controller
 - Performance Models: HP Smart Array P400/512MB BBWC Controller
 - Entry Models: HP Smart Array E200/64MB Controller
- **Internal Drive Support:**
 - Up to (16) hot-plug Serial-attached SCSI (SAS) drives supported
 - (8) drive bays in standard configurations
 - Optional 8-bay drive cage available for maximum storage support (2nd drive bay cage will require additional SAS controller)
 - Two open half-height media bays; supports full height or half height internal tape drive
- **Network Controller:**
 - Two embedded NC373i Multifunction Gigabit Network Adapters with TCP/IP Offload Engine, including support for Accelerated iSCSI through an optional Licensing Kit
- **Expansion Slots:**
 - Nine total expansion slots
 - Eight available: (6) PCI-Express x4 and (2) PCI-X 64-Bit/133MHz
- **USB Ports:**
 - USB 2.0 support
 - Six total ports: (2) ports up front; (2) ports in back; (2) ports internal (one standard connection and one USB tape connection)
- **Redundancy:**
 - Optional Hot plug redundant power supplies and cooling fans
 - Hot plug redundant fans and power supplies included on all Performance models
- **Infrastructure Management:**
 - Convenient slide-out Systems Insight Display for quick and easy front view server diagnostics, along with status LEDs, Automatic Server Recovery (ASR), ROM Based Setup Utility (RBSU)
 - HP ProLiant Onboard Administrator (powered by the HP Integrated Lights-Out 2 management processor) for simplified server setup, health monitoring and recovery, power and thermal control, and lights-out remote administration.
 - HP Insight Control a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, control and optimize your IT infrastructure through a single, simple management console. Insight Control supports both Windows and Linux-based central management servers.
 - HP Insight Dynamics for ProLiant, a product option, is an integrated command center that enables IT Staff personnel to continuously analyze and optimize a converged infrastructure, while automating and reducing the cost of common data center tasks by as much as 40 percent. This ultimately enables them to dynamically keep pace with the organization's changing business requirements.
- **Form Factor:**
 - 5U tower and rack models available (front VGA connection on rack models)
- **Operating Systems and Virtualization Software Support for ProLiant Servers:**
 - Supports Windows, RHEL, SLES, OEL, Solaris, VMware, and Citrix
- **Deployment/Serviceability:**
 - System Insight Display on the front bezel for quick and easy server diagnostics
 - Quick Deploy Rail System includes sliding universal rails, an ambidextrous cable management arm and quick release levers
 - Tool-less access to all system components for easy in-rack serviceability

Overview

- Customer Self Repair (CSR): HP products are designed with many CSR parts to minimize repair time and allow for greater flexibility in performing defective parts replacement
- **Warranty:**
 - This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.
NOTE: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

Standard Features

NOTE: For a brief, printer friendly data sheet that describes this product and informs you of the essential capabilities and specifications, please visit: <http://h71028.www7.hp.com/ERC/downloads/4AA0-6361ENW.pdf>.

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

Processor

One of the following depending on Model

Quad-Core Processors

Quad-Core Intel® Xeon® Processor X5470 (3.33 GHz, 120 Watts, 1333 FSB)

Quad-Core Intel® Xeon® Processor X5450 (3.00 GHz, 120 Watts, 1333 FSB)

Quad-Core Intel® Xeon® Processor E5450 (3.00 GHz, 80 Watts, 1333 FSB)

NOTE: Available via Configure-to-order only. See Factory Integrated Models section for more details.

Quad-Core Intel® Xeon® Processor E5440 (2.83 GHz, 80 Watts, 1333 FSB)

Quad-Core Intel® Xeon® Processor E5430 (2.66 GHz, 80 Watts, 1333 FSB)

Quad-Core Intel® Xeon® Processor E5420 (2.50 GHz, 80 Watts, 1333 FSB)

Quad-Core Intel® Xeon® Processor E5410 (2.33 GHz, 80 Watts, 1333 FSB)

Quad-Core Intel® Xeon® Processor X5365 (3.00 GHz, 120 Watts, 1333 FSB)

Quad-Core Intel® Xeon® Processor X5355 (2.66 GHz, 120 Watts, 1333 FSB)

Quad-Core Intel® Xeon® Processor E5345 (2.33 GHz, 80 Watts, 1333 FSB)

Quad-Core Intel® Xeon® Processor E5335 (2.00 GHz, 80 Watts, 1333 FSB)

Quad-Core Intel® Xeon® Processor E5320 (1.86 GHz, 80 Watts, 1066 FSB)

Quad-Core Intel® Xeon® Processor E5310 (1.60 GHz, 80 Watts, 1066 FSB)

Dual-Core Processors

Dual-Core Intel® Xeon® Processor X5260 (3.33 GHz, 80 Watts, 1333 FSB)

Dual-Core Intel® Xeon® Processor L5240 (3.00 GHz, 40 Watts, 1333 FSB)

Dual-Core Intel® Xeon® Processor X5160 (3.0 GHz, 80 Watts, 1333 FSB)

Dual-Core Intel® Xeon® Processor X5150 (2.67 GHz, 65 Watts, 1333 FSB)

Dual-Core Intel® Xeon® Processor X5140 (2.33 GHz, 65 Watts, 1333 FSB)

Dual-Core Intel® Xeon® Processor X5130 (2.0 GHz, 65 Watts, 1333 FSB)

Dual-Core Intel® Xeon® Processor X5120 (1.86 GHz, 65 Watts, 1066 FSB)

Dual-Core Intel® Xeon® Processor X5110 (1.6 GHz, 65 Watts, 1066 FSB)

NOTE: Up to 2 processors supported. Performance configurations include two processors.

NOTE: Please contact your regional sales support to determine Quad-Core upgradeability. Some of the earlier shipping models may not support upgrades to 5400/5400 Quad-Core processors. 5100 Dual-Core models are not upgradeable to the 5200 Dual-Core processors.

Cache Memory

One of the following depending on Model

4 MB (2 x 2 MB) Level 2 cache (5000 series)

4 MB (1 x 4 MB) Level 2 cache (5100 series)

6 MB (1 x 6 MB) Level 2 cache (5200 series)

8 MB (2 x 4 MB) Level 2 cache (5300 series)

12 MB (2 x 6 MB) Level 2 cache (5400 series)

Standard Features

Chipset	Intel® 5000P Chipset NOTE: For more information regarding Intel chipsets, please see the following URL: http://www.intel.com/products/server/chipsets/ .	
Memory Protection	Advanced ECC, Online Spare and Mirroring NOTE: Mirroring requires optional 2nd memory card.	
Memory One of the following depending on Model	Type	PC2-5300 Fully Buffered DIMMs (DDR2-667) running at 533 MHz with 4:1 interleaving NOTE: 4-way interleaving requires optional 2nd memory card.
	Standard (Entry Models)	1 GB (2 x 512 MB)
	Standard (Base Models)	2 GB (2 x 1 GB)
	Standard (Performance Models)	4 GB (4 x 1 GB)
	Maximum	64 GB (16 x 4 GB with 2 memory cards) NOTE: Memory DIMMs in systems with the Front Side Bus (FSB) running at 1333 MHz will run at 667 MHz and in systems with a FSB running at 1066 MHz or 667 MHz the memory DIMMs will run at 533 MHz.
Network Controller	Two embedded NC373i Multifunction Gigabit Network Adapters with TCP/IP Offload Engine, including support for Accelerated iSCSI through an optional Licensing Kit	

Expansion Slots

Expansion Slot #	Technology	Width	Connector Width*	Bus Number**	Form Factor	Notes
1	PCIe	x4	x8	6	Full length, full height slot	Reserved for integrated RAID controller
2	PCI-X (133MHz, 3.3 Volt)	64-bit	Not applicable	18	Full length, full height slot	Shared bus with slot 3
3	PCI-X (133MHz, 3.3 Volt)	64-bit	Not applicable	18	Full length, full height slot	Shared bus with slot 2
4	PCIe	x4	x8	14	Full length, full height slot	
5	PCIe	x4	x8	11	Full length, full height slot	Optional x8 if PCIE expander is installed in slot 4

Standard Features

6	PCIe	x4	x8	31	Full length, full height slot	
7	PCIe	x4	x8	28	Full length, full height slot	Optional x8 if PCIE expander is installed in slot 6
8	PCIe	x4	x8	25	Full length, full height slot	
9	PCIe	x4	x8	22	Full length, full height slot	Optional x8 if PCIE expander is installed in slot 8

* Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

** Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

Storage Controller One of the following depending on Model

Base Models

HP Smart Array P400/256MB Controller (RAID 0/1/1+0/5)
Available upgrades: 512MB memory BBWC module for, or battery for battery-backed write cache (BBWC) RAID 0/1/1+0/5/6.

Performance Models

HP Smart Array P400/512MB BBWC Controller (RAID 0/1/1+0/5/6)

Entry Models

HP Smart Array E200/64MB Controller (RAID 0/1/1+0)
Available upgrades: 128MB memory module for RAID 0/1/1+0/5, battery for battery-backed write cache (BBWC).

Storage

Diskette Drive
Optical Drive
One of the following depending on Model

None standard
DVD-ROM Drive (Performance Models)
48x IDE CD-ROM Drive (Base and Entry Models)
NOTE: All units after 11/12/2007 will come standard with a DVD-ROM Drive.

Hard Drives

None standard

Maximum Internal Storage

Hot Plug SAS

4.0TB

8 x 500GB with standard 8-bay hot plug Serial-attached SCSI (SAS) drive cage

8.0TB

16 x 500GB with optional 2nd SAS drive cage

Hot Plug SATA

8.0TB

16 x 500GB

Standard Features

Intelligent Manageability	HP Systems Insight Manager SmartStart Management Agent Redundant ROM Remote Flash ROM ROM-Based Setup Utility (RBSU) Integrated Management Log Automatic Server Recovery (ASR) Dynamic Sector Repairing (with Smart Array controller) Drive Parameter Tracking (with Smart Array controller) Hot Spare Boot NOTE: Upon the event of a failed processor in a multi-processing environment, the system will automatically reboot and attempt to use the remaining good processor. Pre-Failure Warranty (covers processors, SAS hard drives and memory)
----------------------------------	---

Interfaces	Serial	1 (2nd serial and parallel port available via option Kit)
	Pointing Device (Mouse)	1
	VGA	1 (+1 front VGA on rack models)
	Keyboard	1
	Network RJ-45	2
	iLO 2 remote management port	1
	USB 2.0 Ports	5 (2 on the rear, 2 on the front, 1 internal) NOTE: Please see the following URL for additional information regarding USB support: http://h18004.www1.hp.com/products/servers/platforms/usb-support.html
	Dedicated USB 2.0 Port	1 (available for DAT USB tape connectivity) NOTE: Internal USB ports are optimal for the attachment of HP DAT USB Internal Tape Drives

Graphics	Integrated ATI ES1000, 32 MB video standard <ul style="list-style-type: none">• 16 bit color: maximum resolution of 1600 x 1200• 32 bit color: maximum resolution of 1280 x 1024 NOTE: Maximum resolution available via iLO 2 remote console is 1280 x 1024.
-----------------	--

Form Factor	Tower and Rack (5U) models available
--------------------	--------------------------------------

HP Insight management software	HP Insight Foundation	Managing the growing number of servers can be complex and expensive for your organization. IT managers need to address changing business needs with tools that meet the challenges of managing today's complex Datacenters. HP provides management solutions that are designed to simplify a server's installation, configuration and maintenance throughout the entire server
---------------------------------------	-----------------------	---

Standard Features

lifecycle. This provides the customer with higher levels of operational efficiency and highly reliable systems: www.hp.com/go/foundation.

The foundation pack includes:

- HP SmartStart
- HP Management
- HP ProLiant Firmware Maintenance

SmartStart version supported (minimum): SmartStart 7.51

<http://www.hp.com/servers/smartstart>

ProLiant Onboard Administrator

HP ProLiant Onboard Administrator (powered by the HP Integrated Lights-Out 2 management processor) simplifies server setup, health monitoring, power and thermal control, and lights-out remote administration of ProLiant ML, DL, and BL servers. HP ProLiant Onboard Administrator functions without additional software, and can be accessed from any location via a web browser. It works hand-in-hand with HP Systems Insight Manager, Insight Control suites, and the Insight Dynamics for ProLiant helping customers unlock the value of the ProLiant platform and deliver the highest possible quality of IT service to the business. See

www.hp.com/go/ProLiantOA

HP Insight Control

HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console.

Two versions of Insight Control are available, to serve environments requiring either a Linux-based or a Windows-based central management server: HP Insight Control for Linux, and HP Insight Control. See www.hp.com/go/insightcontrol

HP Insight Control includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit: <http://www.hp.com/services/insight>.

HP Insight Dynamics for ProLiant

HP Insight Dynamics for ProLiant, a product option, is an integrated command center that enables IT Staff personnel to continuously analyze and optimize a converged infrastructure, while automating and reducing the cost of common data center tasks by as much as 40 percent. As a powerfully integrated by design toolkit to accelerate complex technology projects and simplify daily operations that ultimately enable IT Staff personnel to dynamically keep pace with the organizations changing business requirements. It enables them to plan capacity and power continuously, balance across physical and virtual resources, and ensure cost-effective high availability. It also enables IT organizations to provision infrastructure consistently and automatically from pools of shared resources using a self-service portal. Resources provisioned can range from a single virtual machine to complex multi-tier environments and their associated physical and virtual resource requirements. In addition to the previous functional benefits, it also provides a cost-effective disaster recovery for physical and virtual environments that works with HP StorageWorks Continuous Access

Standard Features

software for both the Enterprise Virtual Array and the XP storage array allowing application environments to be reactivated in minutes with the touch of a button to a remote location.

NOTE: For more information, visit:
<http://www.hp.com/go/insightdynamics>

Industry Standard Compliance	ACPI 1.0b Compliant PCI 2.2 Compliant WOL Support Microsoft® Logo certifications PXE Support
-------------------------------------	--

Security	Power-on password Keyboard password Diskette drive control Diskette boot control QuickLock, Network Server Mode Parallel and serial interface control Administrator's password
-----------------	--

Server Power Cords	110V NEMA -6ft. (1.83m) cord included; IEC 6 ft. (1.83m) cords also included with rack models. NOTE: HP ProLiant ML370 a C13 to C14 2.8M jumper cord ships standard. If customers require a local power cord, they can check the power cord matrix for the appropriate sku. Please see the following power cord matrix: http://www.hp.com/go/powercordmatrix .
---------------------------	---

Power Supply	800 Watt-CE Mark Compliant Hot Plug Power Supply (1000 Watt high line) Optional second Power Supply provides redundant capability NOTE: Please see the "Power Specifications" section later in this document for low line and high line requirements.
---------------------	--

UPS and PDU Power Cord Matrix	Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords
--------------------------------------	---

System Fans	Three hot-plug fans standard. Redundant fan kit includes three additional fans.
--------------------	---

Required Cabling	For external storage cabling information, refer to the Web site at: www.hp.com/servers/ml370 .
-------------------------	--

Standard Features

Operating Systems and Virtualization Software Support for ProLiant Servers

Microsoft Windows Server
Microsoft Windows Server Hyper V
Red Hat Enterprise Linux (RHEL)
SUSE Linux Enterprise Server (SLES)
Oracle Enterprise Linux (OEL)
Solaris
VMware
Citrix for XenServer

NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: <http://www.hp.com/go/ossupport> and our driver download page <http://www.hp.com/support/ML370G5>

Rack Airflow Requirements

Rack 10000 G2 series Cabinets

The increasing power of new high-performance processor technology requires increased cooling efficiency for rack-mounted servers. The 10000 G2 Series Racks provide enhanced airflow for maximum cooling, allowing these racks to be fully loaded with servers using the latest processors.

CAUTION: If a third-party rack is used, observe the following additional requirements to ensure adequate airflow and to prevent damage to the equipment:

- **Front and rear doors:** If your 42U server rack includes closing front and rear doors, you must allow 830 square inches (5,350 sq cm) of hole evenly distributed from top to bottom to permit adequate airflow (equivalent to the required 64 percent open area for ventilation).
- **Side:** The clearance between the installed rack component and the side panels of the rack must be a minimum of 2.75 inches (7 cm).

CAUTION: Always use blanking panels to fill all remaining empty front panel U-spaces in the rack. This arrangement ensures proper airflow. Using a rack without blanking panels results in improper cooling that can lead to thermal damage.

NOTE: For additional information, refer to the Setup and Installation Guide or the Documentation CD provided with the server, or to the server documentation located in the Support section at the following URL: www.hp.com/servers/ml370-g5.

Rack Kit

Quick deploy rail system provides tool-free support for racks with square or round mounting holes (including Compaq/HP 7000, 9000, 10000 G2 and HP series), with an adjustment range of 24" - 36". The ambidextrous cable management arm can be mounted on either the left or right side for improved cable management.

Telco Rack Support

Support for all 2-post Telco racks requires the use of the standard rack kit and an additional option kit from Rack Solutions at: <http://www.racksolutions.com/hp/>

Standard Features

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: <http://www.hp.com/go/factory-express>.

HP Enterprise Configurator

The HP eCo-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance. <http://www.hp.com/products/configurator>.

Service and Support

HP Care Pack services provide total care and support expertise with committed response designed to meet your IT and business needs.

HP Care Pack services include coverage for the HP branded hardware options qualified for the server and purchased at the same time or afterward that are internal to the enclosure. This also includes the 22" and smaller external monitors and tower UPS options up to 3kVA. These items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included, and standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.

To fully capitalizing on your HP ProLiant servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of multi vender support solutions, provides a range of support services designed to meet the varying needs of your business. Whether an SMB, or large global corporation, HP has a ProLiant server support offer to help you speedily deploy and maximize system uptime.

Recommended Service - simplify ProLiant solution implementation, maintenance, and management.

- **Support:** 3-Year 4-Hour response 24x7 Same Business Day Coverage only
- **Deployment Service:** Installation and Start up only

Enhanced Service - optimize service level to increase IT performance and availability.

- **Support:** 3-Year Support Plus 24 only

Refer to the information on "Installation & Start-Up" for service on ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet; to be delivered on a scheduled basis 8am-5pm, M-F, excluding HP holidays.

NOTE: For a complete listing of service offerings and information visit:

<http://www.hp.com/services/proliantservices>

<http://www.hp.com/go/proliant/carepack>

Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information – Factory Integrated Models" section.

HP ML370 G5 Performance Models	Processor(s) Two of the following depending on Model	(2) Quad-Core Intel® Xeon® Processor X5450 (3.00 GHz, 120 Watts, 1333 FSB)
Tower Models: Quad-Core: ML370T05 X5450 458341-001	Cache Memory	12MB (2 x 6 MB) Level 2 cache - 5400 Sequence
	Memory	4 GB (4 x 1 GB); 2 memory cards (2 x 1 GB each card)
	Network Controller	Two embedded NC373i Multifunction Gigabit Server Adapters
	Storage Controller	HP Smart Array P400/512MB BBWC Controller (RAID 0/1/1+0/5/6)
Rack Models: Quad-Core: ML370R05 X5450 458342-001	Hard Drive	None ship standard
	Internal Storage	SAS: 8.0TB maximum with 16 SFF drive option SATA: 8.0TB maximum
	Optical Drive	DVD-ROM Drive (diskette drive optional)
	Power Supply	(1) 800 Watt-CE Mark Compliant Hot Plug Power Supply (1000 Watt high line)
	Fans	(3) hot-plug fans standard
	Form Factor One of the following depending on Model	Tower Rack (5U), (8.75-inch)

HP ML370 G5 Base Models	Processor(s) One of the following depending on Model	(1) Quad-Core Intel® Xeon® Processor E5440 (2.83 GHz, 80 Watts, 1333 FSB) (1) Quad-Core Intel® Xeon® Processor E5430 (2.66 GHz, 80 Watts, 1333 FSB) (1) Dual-Core Intel® Xeon® Processor X5260 (3.33 GHz, 80 Watts, 1333 FSB)
Tower Models: Quad-Core: ML370T05 E5440 458343-001 ML370T05 E5430 458345-001	Cache Memory One of the following depending on Model	12MB (2 x 6MB) Level 2 cache - 5400 Sequence 6MB (1 x 6MB) Level 2 cache - 5200 Sequence
	Memory	2 GB (2 x 1 GB); 1 memory card
	Network Controller	Two embedded NC373i Multifunction Gigabit Server Adapters
	Storage Controller	HP Smart Array P400/256MB Controller (RAID 0/1/1+0/5)
Dual-Core: ML370T05 X5260 458425-001	Hard Drive	None ship standard
	Internal Storage	SAS: 8.0TB maximum with 16 SFF drive option SATA: 8.0TB maximum
Rack Models: Quad-Core: ML370R05 E5440 458344-001 ML370R05 E5430 458346-001	Optical Drive DVD-ROM standard after 11/12/07	48x CD-ROM Drive (diskette optional)
	Power Supply	(1) 800 Watt-CE Mark Compliant Hot Plug Power Supply (1000 Watt high line)
Dual-Core: ML370R05 X5260 458426-001	Fans	(3) hot-plug fans standard
	Form Factor One of the following depending on Model	Tower Rack (5U), (8.75-inch)

Models

HP ML370 G5 Entry Models

Tower Models:

Quad-Core:
ML370T05 E5410
458347-001

Dual-Core:

Rack Models:
Quad-Core:
ML370R05 E5410
458348-001

Processor(s)

One of the following depending on Model

(1) Quad-Core Intel® Xeon® Processor E5410 (2.33 GHz, 80 Watts, 1333 FSB)

Cache Memory

12MB (2 x 6MB) Level 2 cache - 5400 Sequence

Memory

1 GB (2 x 512 MB) Level 2 cache

Network Controller

Two embedded NC373i Multifunction Gigabit Server Adapters

Storage Controller

HP Smart Array E200/64MB Controller (RAID 0/1/1+0)

Hard Drive

None ship standard

Internal Storage

SAS: 8.0TB maximum with 16 SFF drive option

SATA: 8.0TB maximum

Optical Drive

48x CD-ROM (diskette optional)

DVD-ROM standard after 11/12/07

Power Supply

(1) 800 Watt-CE Mark Compliant Hot Plug Power Supply (1000 Watt high line)

Fans

(3) hot-plug fans standard

Form Factor

Tower

One of the following depending on Model

Rack (5U), (8.75-inch)

Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

NOTE: HP does not allow factory integration of options into standard models listed above. Configure-to-order servers must start with a CTO Chassis.

NOTE: FIO indicates that this option only available as a Factory Installable Option.

Step 1: Base Configuration (choose one of the following configurable models)

Models	HP ML370 G5 Rack SAS CTO Chassis	400606-B21
	Factory Integrated Model ships with:	
	Two embedded NC373i Multifunction Gigabit Server Adapters	
	Eight Hot Plug SAS Drive Bays	
	9 expansion slots - 7 PCI-Express x4 and 2 PCI-X 64-bit 133 MHz	
	Integrated Lights-Out 2 (iLO2)	
	800 Watt-CE Mark Compliant Hot Plug Power Supply	
	Three fans	
	Rack (5U)	
	HP ML370 G5 Tower SAS CTO Chassis	400607-B21
	Factory Integrated Model ships with:	
	Two embedded NC373i Multifunction Gigabit Server Adapters	
	Eight Hot Plug SAS Drive Bays	
	9 expansion slots - 7 PCI-Express x4 and 2 PCI-X 64-bit 133 MHz	
	Integrated Lights-Out 2 (iLO2)	
	800 Watt-CE Mark Compliant Hot Plug Power Supply	
	Three fans	
	Keyboard	
	2-button Mouse	
	Tower (5U)	

Step 1A: Choose Storage Controller (only one of the following)

Storage Controller	Smart Array P400/256 MB Controller	405132-B21
	NOTE: PCI Express.	
	HP Smart Array P400/512 MB BBWC Controller	411064-B21
	NOTE: PCI Express.	
	HP Smart Array E200/128 BBWC Controller	411508-B21
	NOTE: PCI Express.	
	HP Smart Array P600/256 BBWC Controller	337972-B21
	NOTE: PCI-X SA-P600 has internal and external connectors.	
	HP Smart Array 6404/512 FIO Controller	452240-B21

Configuration Information - Factory Integrated Models

Step 2: Choose Required Options (only one of the following from each list)

Processors

NOTE: If High Performance Model features are desired, 2nd processor is included in the Performance Pack part numbers in Step 3 below.

Quad-Core Processors

Quad-Core Intel® X5470 (3.33 GHz, 120 Watts, 1333 FSB) ML370 G5 FIO Kit	488039-L21
Quad-Core Intel® X5460 (3.16 GHz, 120 Watts, 1333 FSB) ML370 G5 FIO Kit	458408-L21
Quad-Core Intel® X5450 (3.00 GHz, 120 Watts, 1333 FSB) ML370 G5 FIO Kit	462711-L21
Quad-Core Intel® E5450 (3.00 GHz, 80 Watts, 1333 FSB) ML370 G5 FIO Kit	458410-L21
Quad-Core Intel® E5440 (2.83 GHz, 80 Watts, 1333 FSB) ML370 G5 FIO Kit	458412-L21
Quad-Core Intel® E5430 (2.66 GHz, 80 Watts, 1333 FSB) ML370 G5 FIO Kit	458414-L21
Quad-Core Intel® E5420 (2.50 GHz, 80 Watts, 1333 FSB) ML370 G5 FIO Kit	458416-L21
Quad-Core Intel® E5410 (2.33 GHz, 80 Watts, 1333 FSB) ML370 G5 FIO Kit	458418-L21
Quad-Core Intel® E5405 (2.00 GHz, 80 Watts, 1333 FSB) ML370 G5 FIO Kit	458420-L21

Dual-Core Processors

Dual-Core Intel® X5260 (3.33 GHz, 80 Watts, 1333 FSB) ML370G5 FIO Kit	458422-L21
---	------------

Base Memory

1 GB FBD PC2-5300 2 x 512 MB Single Rank Kit	397409-B21
2 GB FBD PC2-5300 2 x 1 GB Dual Rank Kit	397411-B21
2 GB FBD PC2-5300 2 x 1 GB Low Power Single Rank Kit	461826-B21
4 GB FBD PC2-5300 2 x 2 GB Dual Rank Kit	397413-B21
4 GB FBD PC2-5300 2 x 2 GB Low Power Dual Rank Kit	461828-B21
8 GB FBD PC2-5300 2 x 4 GB Dual Rank Kit	397415-B21
8 GB FBD PC2-5300 2 x 4 GB Low Power Dual Rank Kit	466440-B21
ML370 G5 Memory Board Kit	403766-B21

NOTE: 2 Memory Board required for support of 4:1 interleaving; 2 boards included on Performance models.

NOTE: Memory Option Kits include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, please visit:

<http://h18004.www1.hp.com/products/servers/platforms/energyefficient/>.

Step 3: Choose Additional Factory Integratable Options

Optical Drives

DVD-ROM Drive Option Kit	217053-B21
--------------------------	------------

Performance Packs

The HP ProLiant ML370 G5 Performance Packs are necessary to configure a HP ProLiant ML370 G5 High Performance Model which includes the latest performance technologies and enterprise class availability features pre-installed for convenience and value. The Performance Pack includes a 2nd processor, redundant fan, power supply, and memory expansion board.

NOTE: Must also select 217503-B21 to achieve parity to ML370 G5 High Performance Models.

HP ML370G5 X5450 HPM FIO Perf Pack	460928-B21
HP ML370G5 E5345 HPM FIO Perf Pack	436374-B21



Configuration Information - Factory Integrated Models

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below.

Core Options

NOTE: Some options may not be factory configurable. Please contact your local sales representative for additional information.

Unique Options	ML370 G5 SAS SFF 8-bay Drive Cage Kit NOTE: 2nd drive cage requires a storage controller.	401415-B21
	ML370 G5 Memory Board Kit NOTE: 2 Memory Boards required for support of 4:1 interleaving; 2 included with Performance models.	403766-B21
	Tower to Rack Conversion ML370 G5 Kit	400899-B21
	X4/X8 PCIE Bus Expander	403724-B21
	Hot Plug Redundant Fan ML370 G5 Kit	400693-B21

Processor

Quad-Core Processors

Quad-Core Intel® Xeon® Processor X5470 (3.33 GHz, 120 Watts, 1333 FSB)	488039-B21
Quad-Core Intel® Xeon® Processor X5460 (3.16 GHz, 120 Watts, 1333 FSB)	458408-B21
Quad-Core Intel® Xeon® Processor X5450 (3.00 GHz, 120 Watts, 1333 FSB)	462711-B21
Quad-Core Intel® Xeon® Processor E5450 (3.00 GHz, 80 Watts, 1333 FSB)	458410-B21
Quad-Core Intel® Xeon® Processor E5440 (2.83 GHz, 80 Watts, 1333 FSB)	458412-B21
Quad-Core Intel® Xeon® Processor E5430 (2.66 GHz, 80 Watts, 1333 FSB)	458414-B21
Quad-Core Intel® Xeon® Processor E5420 (2.50 GHz, 80 Watts, 1333 FSB)	458416-B21
Quad-Core Intel® Xeon® Processor E5410 (2.33 GHz, 80 Watts, 1333 FSB)	458418-B21
Quad-Core Intel® Xeon® Processor E5405 (2.00 GHz, 80 Watts, 1333 FSB)	458420-B21
Quad-Core Intel® Xeon® Processor X5365 (3.00 GHz, 120 Watts, 1333 FSB)	450321-B21
Quad-Core Intel® Xeon® Processor X5355 (2.66 GHz, 120 Watts, 1333 FSB)	433104-B21
Quad-Core Intel® Xeon® Processor E5345 (2.33 GHz, 80 Watts, 1333 FSB)	433102-B21
Quad-Core Intel® Xeon® Processor E5335 (2.00 GHz, 80 Watts, 1333 FSB)	437391-B21
Quad-Core Intel® Xeon® Processor E5320 (1.86 GHz, 80 Watts, 1066 FSB)	433098-B21

Dual-Core Processors

Dual-Core Intel® Xeon® Processor X5260 (3.0 GHz, 80 Watts, 1333 FSB)	458422-B21
Dual-Core Intel® Xeon® Processor L5240 (3.0 GHz, 40 Watts, 1333 FSB)	461765-B21

Core Options

Memory	1 GB FBD PC2-5300 2 x 512 MB Single Rank Kit	397409-B21
	2 GB FBD PC2-5300 2 x 1 GB Dual Rank Kit	397411-B21
	2 GB FBD PC2-5300 2 x 1 GB Low Power Single Rank Kit	461826-B21
	4 GB FBD PC2-5300 2 x 2 GB Dual Rank Kit	397413-B21
	4 GB FBD PC2-5300 2 x 2 GB Low Power Dual Rank Kit	461828-B21
	8 GB FBD PC2-5300 2 x 4 GB Dual Rank Kit	397415-B21
	8 GB FBD PC2-5300 2 x 4 GB Low Power Dual Rank Kit	466440-B21
	ML370 G5 Memory Board Kit	403766-B21

NOTE: 2 Memory Board required for support of 4:1 interleaving; 2 boards included on Performance models.

NOTE: Memory Option Kits include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, please visit:

<http://h18004.www1.hp.com/products/servers/platforms/energyefficient/>.

Smart Buy Memory	1 GB FBD PC2-5300 2 x 512 MB Kit	397409-S21
	2 GB FBD PC2-5300 2 x 1 GB Kit	397411-S21
	4 GB FBD PC2-5300 2 x 2 GB Kit	397413-S21

Internal Storage	ML370 G5 SAS SFF 8-bay Drive Cage Kit	401415-B21
------------------	---------------------------------------	------------

NOTE: Optional 2nd drive cage requires a dedicated storage controller.

Diskette Drive	Floppy Drive ML350/370 G5 Kit	409582-B21
----------------	-------------------------------	------------

Serial Port Kit	Parallel/Serial Port ML370/350 G5 Kit	401222-B21
-----------------	---------------------------------------	------------

Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

SAS Hot Plug SFF Enterprise (ENT) Drives

HP 300GB 6G SAS 10K SFF DP ENT HDD	507127-B21
HP 300GB 3G SAS 10K SFF DP ENT HDD	492620-B21
HP 146GB 6G SAS 15K SFF DP ENT HDD	512547-B21
HP 146GB 3G SAS 15K SFF DP ENT HDD	504062-B21
HP 146GB 6G SAS 10K SFF DP ENT HDD	507125-B21
HP 146GB 3G SAS 10K SFF DP ENT HDD	418367-B21
HP 72GB 6G SAS 15K SFF DP ENT HDD	512545-B21
HP 72GB 3G SAS 15K SFF DP ENT HDD	418371-B21
HP 72GB 3G SAS 10K SFF DP ENT HDD	384842-B21

SAS Hot Plug SFF Midline (MDL) Drives

HP 500GB 6G SAS 7.2K SFF DP MDL HDD	507610-B21
-------------------------------------	------------



Core Options

NOTE: SAS Enterprise drives have a 3 year warranty, while SAS Midline drives have a 1 year warranty. Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/12244_na/12244_na.html

SATA Hot Plug SFF Midline (MDL) Drives

HP 500GB 3G SATA 7.2K 2.5in MDL HDD 507750-B21

HP 160GB 3G SATA 7.2K 2.5in MDL HDD 530888-B21

SATA Hot Plug SFF Entry (ETY) Drives

HP 250GB 3G SATA 5.4K SFF ETY HDD 460355-B21

HP 120GB 1.5G SATA 5.4K SFF ETY HDD 458924-B21

NOTE: SATA hard drives have a 1-year warranty. Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13021_na/13021_na.html

SATA Hot Plug Midline (MDL) Solid State Drives

HP 60GB 3G SATA 2.5in MDL 1y Wty SSD 572071-B21

HP 120GB 3G SATA 2.5in MDL 1y Wty SSD 572073-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13415_na/13415_na.html

Communications

Gigabit Ethernet Adapters

HP NC110T PCI Express Gigabit Server Adapter 434905-B21

HP NC360T PCI Express Dual Port Gigabit Server Adapter 412648-B21

HP NC364T PCI Express Quad Port Gigabit Server Adapter 435508-B21

NOTE: There is a maximum of five NC364T PCI Express Quad Port Gigabit Server Adapters allowed in this server.

HP NC373F PCI Express Multifunction Gigabit Server Adapter 394793-B21

HP NC373T PCI Express Multifunction Gigabit Server Adapter 394791-B21

HP NC380T PCI Express Dual Port Multifunction Gigabit Server Adapter 394795-B21

NOTE: Supported on a Full Length-Full Height slot only.

10 Gigabit Ethernet Adapters

HP NC522SFP Dual Port 10GbE Server Adapter 468332-B21

NOTE: A minimum of two gigabyte (2 GB) of server memory is required per each NC522SFP adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately.

NOTE: Please see the QuickSpecs for Technical Specifications and additional information: www.hp.com/go/ProLiantNICs.

Power Supplies

Redundant Power Supply 350/370/380 G5 Kit (IEC Cord) 399771-B21

Redundant Power Supply 350/370/380 G5 Kit (NEMA Cord) 399771-001

Power Options

Hot Plug Redundant Fan ML370 G5 Kit 400693-B21



Additional Options

HP Insight Software

HP Insight Control server deployment

HP Insight Control server deployment, Electronic License including 1 year of 24x7 Technical Support and Updates

T9082AAE

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Electronic software is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent.

NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

NOTE: Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>.

NOTE: For additional license options please see the Insight Control QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12631_na/12631_na.html

HP Insight Control for Linux

HP Insight Control for Linux, 1-server license, including one year of 24x7 Technical Support and Updates, Electronic

T9084BAE

HP Insight Control for Linux, No Media, 1-Server license, including one year of 24x7 Technical Support and Updates

464423-B22

HP Insight Control for Linux, Media pack (DVD) - No licenses included

464422-B22

NOTE: Media pack DVD contains HP Insight Control for Linux, HP Systems Insight Manager, HP Insight Control power management, HP Insight Control virtual machine management, and an integrated installer. Servers must be acquired separately.

NOTE: Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>.

NOTE: Electronic software is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent.

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single set of activation keys.

NOTE: For additional License Kits, including electronic licensing options, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/13019_na/13019_na.html

HP Integrated Lights-Out Advanced

HP Integrated Lights-Out Advanced, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates

512485-B21

NOTE: This license allows 1 server to be deployed and managed via HP iLO Advanced. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service

NOTE: For additional license kits, including electronic delivery options, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12362_na/12362_na.html

HP Insight Rapid Deployment software

HP Insight Rapid Deployment software No Media 1-Server License, including 1 year of 24x7 Technical Support and Updates

452151-B21

NOTE: This license allows 1 server to be deployed and managed via RDP. Customer

Additional Options

will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service

NOTE: For additional license kits, including electronic delivery options, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11053_na/11053_na.html

Storage Controllers

SAS Controllers

Smart Array E200 Controller

HP Smart Array E200/128 BBWC Controller 411508-B21

Smart Array E500 Controller

HP Smart Array E500/256MB Controller 435129-B21

Smart Array P400 Controller

HP Smart Array P400/256MB Controller 405132-B21

NOTE: Supports RAID 0/1/5.

HP Smart Array P400/512MB BBWC Controller 411064-B21

NOTE: Supports RAID 0/1/1+0/5/6.

Smart Array P600 Controller

HP Smart Array P600/256 BBWC Controller 337972-B21

NOTE: Supports external drive attach.

Smart Array P800 Controller

HP Smart Array P800/512 BBWC Controller 381513-B21

NOTE: Supports external drive attach.

Optional Upgrades

128 MB BBWC (Battery-Backed Write Cache) Enabler 351580-B21

NOTE: Supports the Smart Array E200 Controller and Smart Array 642 Controller.

512MB Battery-backed cache upgrade 405148-B21

NOTE: Supports the Smart Array P400 Controller.

Battery-backed write cache upgrade 383280-B21

NOTE: Supports the Smart Array P400 Controller.

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/12460_na/12460_na.html
(Smart Array E200 Controller)

http://h18000.www1.hp.com/products/quickspecs/12700_na/12700_na.html
(Smart Array E500 Controller)

http://h18000.www1.hp.com/products/quickspecs/12400_na/12400_na.html
(Smart Array P400 Controller)

http://h18000.www1.hp.com/products/quickspecs/12247_na/12247_na.html
(Smart Array P600 Controller)

http://h18000.www1.hp.com/products/quickspecs/12616_na/12616_na.html
(Smart Array P800 Controller)

SAS HBA

HP SC08Ge Host Bus Adapter 488765-B21

Additional Options

HP SC44Ge Host Bus Adapter	416096-B21
NOTE: When using the SC44Ge with SATA Hard Drives, 1.5G SATA Hard Drives are required. Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS.	
HP 8 Internal Port SAS HBA with RAID	347786-B21
NOTE: When using the 8 Internal Port SAS HBA with SATA Hard Drives, 1.5G SATA Hard Drives are required.	
NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
http://h18004.www1.hp.com/products/quickspecs/12617_na/12617_na.html (SC44Ge HBA)	
http://h18004.www1.hp.com/products/quickspecs/12332_na/12332_na.html (8 Internal Port SAS HBA)	
SCSI Controllers for External Drive/Storage Support	
Smart Array 6402/128 Controller	273915-B21
NOTE: Ultra320 SCSI.	
Smart Array 6404/256 Controller	273914-B21
NOTE: Ultra320 SCSI.	
Smart Array 642 Controller	291967-B21
NOTE: Ultra320 SCSI.	
128-MB BBWC (Battery-Backed Write Cache) Enabler	351580-B21
NOTE: Supports the Smart Array E200 Controller and Smart Array 642 Controller.	
64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2	374654-B21
SCSI HBA	
HP SC11Xe Host Bus Adapter	412911-B21
NOTE: Recommended HBA for SCSI tape drive connect.	
NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
http://h18000.www1.hp.com/products/quickspecs/11943_na/11943_na.html (Single Channel Ultra320 SCSI HBA)	
http://h18000.www1.hp.com/products/quickspecs/11587_na/11587_na.html (Smart Array 6400 Series)	
http://h18000.www1.hp.com/products/quickspecs/12069_na/12069_na.html (Smart Array 642)	
http://h18000.www1.hp.com/products/quickspecs/10429_na/10429_na.html (SCSI Adapter)	
http://h18000.www1.hp.com/products/quickspecs/12566_na/12566_na.html (SC11Xe HBA)	
http://h18004.www1.hp.com/products/quickspecs/13082_na/13082_na.html (SC08Ge HBA)	

Additional Options

Tape Storage

NOTE: For the complete listing of Tape Drive offerings, please see:
<http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html>

Tape Drives

DAT 320 WW SAS External Tape Drive	AJ828A
DAT 320 USB External Tape Drive	AJ823A
HP DAT 320 USB Internal Tape Drive	AJ825A

SAS Tape Drives

NOTE: For the ML370 G5, HP recommends purchasing the HP SC44Ge HBA (416096-B21) for a dedicated SAS HBA for tape.

HP DAT 320 SAS Internal Tape Drive	AJ830A
HP StorageWorks LTO-2 Ultrium 448 SAS Internal Tape	DW085A
HP StorageWorks LTO-3 Ultrium 920 SAS Internal Tape Drive	EH847A
HP StorageWorks LTO-4 Ultrium 1760 SAS Internal Tape Drive	EH919A

NOTE: Please refer to the "Tape Drives, Tape Autoloaders & Tape Libraries" table in the Storage section of this document for a list of SAS controllers with tape support.

HP StorageWorks 1/8 G2 Tape Autoloader

HP StorageWorks 1/8 G2 LTO-4 Ultrium 1760 SAS Tape Autoloader	AK377A
HP StorageWorks 1/8 G2 LTO-3 Ultrium 920 SAS Autoloader	AH558A
HP StorageWorks 1/8 G2 Tape Autoloader Rack Kit	AH166A

NOTE: Required to install the 1/8 G2 Autoloaders in a standard 19-inch rack; includes rails and rackmount instructions.

NOTE: Please reference the Tape Autoloader QuickSpecs at:
<http://www.hp.com/go/automation> for additional information needed to create a complete solution; reference current compatibility information at:
<http://www.hp.com/go/ebs>.

HP StorageWorks MSL2024 Tape Library

HP StorageWorks MSL2024 1 LTO-4 Ultrium 1760 SAS Drive Library	AK378A
HP StorageWorks MSL2024 1 LTO-3 Ultrium 920 SAS Drive Library	AH559A

HP StorageWorks MSL4048 Tape Library

HP StorageWorks MSL4048 2 LTO-4 Ultrium 1760 SAS Drive Library	AK380A
HP StorageWorks MSL4048 1 LTO-3 Ultrium 920 SAS Drive Library	AH560A

NOTE: Please reference the MSL Tape Library QuickSpecs at:
<http://www.hp.com/go/automation> for additional information needed to create a complete solution; reference current compatibility information at:
<http://www.hp.com/go/ebs>.

Additional Options

Disk-Based Backup

RDX Removable Disk Backup

HP StorageWorks RDX500 Internal Removable Disk Backup System

AJ934A

NOTE: 500GB of Disk Storage.

NOTE: Please see the HP RDX Removable Disk Backup System QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/13036_na/13036_na.html

D2D Backup

HP StorageWorks D2D2502i Backup System

EJ001A

NOTE: 2 TB raw capacity/1.5 TB useable capacity.

HP StorageWorks D2D2504i Backup System

EJ002A

NOTE: 4 TB raw capacity/3 TB useable capacity.

NOTE: Please see the HP D2D Backup Systems QuickSpecs for additional information: <http://www.hp.com/go/d2d>.

StorageWorks Options

HP StorageWorks Fibre Channel HBAs

NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see:

<http://h18006.www1.hp.com/storage/saninfrastructure/hba.html>

Brocade Fibre Channel HBAs

HP StorageWorks 81B PCI-e FC HBA Single Port

AP769A

HP StorageWorks 82B PCI-e FC HBA Dual Port

AP770A

HP StorageWorks 41B 4Gb PCI-e FC HBA

AP767A

HP StorageWorks 42B 4Gb Dual-Port PCI-e FC HBA

AP768A

Emulex Fibre Channel HBAs

HP StorageWorks 81E PCI-e FC HBA Single Port

AJ762A

HP StorageWorks 82E PCI-e FC HBA Dual Port

AJ763A

HP StorageWorks FC2142 4Gb PCI-e HBA

A8002A

HP StorageWorks FC2242 Dual Channel 4Gb PCI-e HBA

A8003A

QLogic Fibre Channel HBAs

HP StorageWorks 81Q PCI-e FC HBA Single Port

AK344A

HP StorageWorks 82Q PCI-e FC HBA Dual Port

AJ764A

HP StorageWorks FC1142 4Gb PCI-e HBA

AE311A

HP StorageWorks FC1242 Dual Channel 4Gb PCI-e HBA

AE312A

StorageWorks SCSI HBA

HP U320e SCSI Host Bus Adapter

AH627A

NOTE: Recommended HBA for MSL SCSI Tape Library connect.

Additional Options

HP StorageWorks Modular Smart Array	MSA SAN Storage Arrays	
	HP StorageWorks 50 Modular Smart Array	364430-B21
	NOTE: Please see the QuickSpecs for additional options and configuration information at: http://h18000.www1.hp.com/products/quickspecs/12245_na/12245_na.html	
	HP StorageWorks 60 Modular Smart Array	418408-B21
	NOTE: Please see the QuickSpecs for additional options and configuration information at: http://h18000.www1.hp.com/products/quickspecs/12627_na/12627_na.html	
	HP StorageWorks 70 Modular Smart Array Enclosure	418800-B21
	NOTE: Please see the Modular Smart Array 70 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: http://h18000.www1.hp.com/products/quickspecs/12652_na/12652_na.html	
	<hr/>	
Uninterruptible Power Systems	HP Tower UPS	
	HP T1500 G3 UPS Models	
	HP T1500 G3 UPS	AF450A
	NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/13160_na/13160_na.html	
	NOTE: For additional information on HP Uninterruptible Power Systems please go to: www.hp.com/servers/rackups .	
	HP Rack-mountable UPS	
	HP R1500 G2 UPS	
	HP, R1.5kVA UPS, 1U	AF419A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/12507_na/12507_na.html	
	HP R3000 UPS	
	HP R3000 VA UPS, 2U, Low voltage L5-30	AF422A
	HP R3000 VA UPS, 2U, High voltage L6-20	AF423A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/10671_na/10671_na.html	
	HP R/T3000 Uninterruptible Power System (UPS)	
HP R/T3000 UPS, Low voltage	AF452A	
HP R/T3000 UPS, High voltage	AF453A	
NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/13417_na/13417_na.html		
HP Rack-Mountable R5500 UPS		
HP R5500 VA UPS	AF426A	
NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/11871_na/11871_na.html		

Additional Options

NOTE: For additional information on HP Uninterruptible Power Systems please go to:
www.hp.com/servers/rackups.

Power Distribution Units	Monitored PDUs	
	HP Monitored Power Distribution Unit: Full Rack Version	
	HP 17.3 kVA S2324 Monitored PDU- dual input, 3Ø, 24A	AF503A
	HP 8.6 kVA S1324 Monitored PDU- single input, 3Ø, 24A	AF504A
	HP 16.6 kVA S2140 Monitored PDU- dual input, 1Ø, 40A	AF505A
	HP Monitored Power Distribution Unit: Half Rack Version	
	HP 4.9 kVA S124 Monitored PDU- single input, 1Ø, 24A	AF914A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/12118_na/12118_na.html	
	Modular PDUs 1U/0U (up to 32 outlets)	
	NOTE: 1U/0U mounting brackets shipped with the unit (optimized for 10000 G2 and 9000 series racks).	
	Fixed Cord Extension Bars	351655-B21
	NOTE: Two extension bar sticks; each with (7) C13 plugs.	
	3.6kVA Model - mPDU, 16A, High	252663-B24
	2.8 kVA Model - mPDU, 24A, Low	252663-D71
	4.9kVA Model - mPDU, 24A, High	252663-D72
	8.3kVA Model - mPDU, 40A, High	252663-B21
	8.3kVA Model - mPDU, 40A, High (power cord attached)	252663-D73
	NOTE: For additional information on HP Power Distribution Units including accessories please go to: www.hp.com/go/pdu	

HP Rack Series	HP Rack 5000 Series (Graphite Metallic)	
	HP 5642 Rack-Unassembled	358254-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/12074_na/12074_na.html	
	HP Rack 10000 G2 Series (Carbon/Graphite Metallic)	
	S10614 (14U) Rack Cabinet - Shock Pallet	292302-B22
	10642 G2 (42U) Rack Cabinet - Pallet	AF001A
	10642 G2 (42U) Rack Cabinet - Shock Pallet	AF002A
	10642 G2 (42U) Rack Cabinet - Crated	AF003A
	10642 G2 (42U) Rack Cabinet, with Extension - Shock Pallet	AF004A
	10636 G2 (36U) Rack Cabinet - Pallet	AF011A
	10636 G2 (36U) Rack Cabinet - Shock Pallet	AF012A
	10636 G2 (36U) Rack Cabinet - Crated	AF013A
	10636 G2 (36U) Rack Cabinet, with Extension - Shock Pallet	AF014A
	10622 G2 (22U) Rack Cabinet - Pallet	AF021A

Additional Options

10622 G2 (22U) Rack Cabinet - Shock Pallet	AF022A
10642 G2 (42U) Rack Cabinet 1200mm Deep - Shock Pallet	AF034A
10642 G2 (42U) Rack Cabinet 1200mm Deep - Pallet	AF038A
10842 G2 (42U) 800mm Wide Rack Cabinet - Pallet	AF041A
10842 G2 (42U) 800mm Wide Rack Cabinet - Shock Pallet	AF042A
10647 G2 (47U) Rack Cabinet - Pallet	AF031A
10647 G2 (47U) Rack Cabinet 1200mm Deep - Shock Pallet	AF044A
NOTE: Due to handling and shipping requirements, AF044A is only orderable through HP Factory Express. It is not for direct sales. Customer site surveys are required before an order is approved. CTO orders may require additional lead time.	
10647 G2 (47U) Rack Cabinet 1200mm Deep - Pallet	AF045A
NOTE: It is mandatory to use a shock pallet when shipping racks with equipment installed.	
NOTE: xxxxx-B22 (shock pallet) used to ship racks with equipment installed (by custom systems, VARs and Channels).	
NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/12402_na/12402_na.html	
NOTE: For additional information regarding Rack Cabinets, please see the following URL: http://www.hp.com/go/rackandpower .	

HP Rack Options

Keyboards and Monitors

TFT7600 Rackmount Keyboard Monitor	AG052A
HP TAA TFT7600 Rkmntybd 17in Monitor	AG067A
1U Rackmount Keyboard with USB	AG072A
NOTE: For additional information regarding Rack Cabinets, please see the following URL: http://www.hp.com/go/rackandpower .	

HP KVM Switch Options

2x1x16 IP Console Switch with Virtual Media	AF601A
4x1x16 IP Console Switch with Virtual Media	AF602A
1x1Ex8 KVM IP Console Switch G2 with Virtual Media and CAC	AF620A
2x1Ex16 KVM IP Console Switch G2 with Virtual Media and CAC	AF621A
4x1Ex32 KVM IP Console Switch G2 with Virtual Media and CAC	AF622A
2x16 Server Console Switch with Virtual Media	AF600A
0x2x16 KVM Server Console G2 Switch with Virtual Media and CAC	AF618A
0x2x32 KVM Server Console G2 Switch with Virtual Media and CAC	AF619A
PS/2 Virtual Media Interface Adapter, 1 pack	AF604A
NOTE: Requires PS/2 and one USB port on server.	
Server console switch 0x2x8	AF616A
Server console switch 0x2x16	AF617A
HP TAA Server console switch 0x2x16	AF626A
PS/2 Interface Adapter, 1 pack	262588-B21
PS/2 Interface Adapter, 8 pack	262587-B21

Additional Options

NOTE: Cat5e cables are required to connect Interface Adapters to Console Switches. Cat5e cables can be found at the following URL: <http://www.hp.com/go/kvm>.

HP 1x4 Console Switch	AF611A
PS2 Server Console Cable, 6 ft, 2 pack	AF612A
USB Server Console Cable, 6 ft, 2 pack	AF613A

NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <http://www.hp.com/go/kvm>.

HP Serial Console Server Options

HP 16 Port Serial Console Server	AF101A
HP 48 Port Serial Console Server	AF102A
Serial Adapter, RJ45-DB9 DCE Female, 1 Pack	AF103A
Serial Adapter, RJ45-DB9 DCE Female, 8 Pack	AF110A

NOTE: Cat5e cables are required to connect Serial Adapters to Serial Console Servers. Additional Serial Adapters and Cat5e cables can be found at the following URL: <http://www.hp.com/go/kvm>.

NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <http://www.hp.com/go/kvm>.

USB and SD Options	HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)	DC172B
	1.44MB External USB Floppy Drive	DC141B
	HP USB 04 Standard Keyboard	DT528A#ABA
	HP 1GB USB 2.0 Floppy Drive Key	442085-B21

Service and Support Offerings (HP Care Pack Services)

Hardware Services On-site Service

NOTE: To attach 3 year, 4-Hour On-site Service to Smart Buy servers, Smart Buy Care Packs must be used. For other service levels, order standard Care Pack part numbers.

4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic	U4528E
4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	U4529E

NOTE: Use one of the following Smart Buy Care Packs to attach 3 year, 4-Hour On-site Service to Smart Buy servers. For other service levels, order standard Care Pack part numbers.

ML370 Smart Buy 4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic	UE903E
ML370 Smart Buy 4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	UE904E

Hardware Services 6-Hour Call to Repair On-site Service

6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	U4530E
---	--------

Installation & Start-up Services

Hardware Installation, Electronic	U4538E
-----------------------------------	--------

Additional Options

Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays, Electronic U4539E

Support Plus

Onsite HW support, 8am-9pm, M-F, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excl. HP holidays, Electronic U4540E

Support Plus 24

Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic U4541E

Onsite HW support 24x7, 4hr response and SuSE Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic U6311E

Onsite HW support 24x7, 4hr response and Red Hat ES Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic U8333E

NOTE: For more information, customer/resellers can contact:

<http://www.hp.com/services/carepack>.

Memory

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

NOTE: Memory DIMMs in systems with the Front Side Bus (FSB) running at 1333 MHz will run at 667 MHz and in systems with a FSB running at 1066 MHz or 667 MHz the memory DIMMs will run at 533 MHz.

HP ProLiant ML370 G5 Models

Minimum Memory

1 GB PC2-5300 Fully Buffered DIMMs (DDR2-667) running at 533 MHz (2 x 512 MB)

Maximum Memory Replaced with Optional Memory

Up to 64 GB of memory is available with the removal of the standard 1 GB of memory. With 2 memory cards: 4 GB PC2-5300 Fully Buffered DIMMs (DDR2-667) running at 533 MHz (16 x 4 GB with 2 memory cards).

NOTE: Not all FB DIMM sizes available at product launch.

NOTE: This chart does not represent all possible memory configurations.

NOTE: Memory DIMMs in systems with the Front Side Bus (FSB) running at 1333 MHz will run at 667 MHz and in systems with a FSB running at 1066 MHz or 667 MHz the memory DIMMs will run at 533 MHz.

Memory			Slot							
			1	2	3	4	5	6	7	8
Standard	1 GB		512 MB	Empty	Empty	Empty	512 MB	Empty	Empty	Empty
Maximum	64 GB	1 st card	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB
		2 nd card	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB

Following are memory options available from HP:



1 GB FBD PC2-5300 2 x 512 MB Single Rank Kit	397409-B21
2 GB FBD PC2-5300 2 x 1 GB Dual Rank Kit	397411-B21
2 GB FBD PC2-5300 2 x 1 GB Low Power Single Rank Kit	461826-B21
4 GB FBD PC2-5300 2 x 2 GB Dual Rank Kit	397413-B21
4 GB FBD PC2-5300 2 x 2 GB Low Power Dual Rank Kit	461828-B21
8 GB FBD PC2-5300 2 x 4 GB Dual Rank Kit	397415-B21
8 GB FBD PC2-5300 2 x 4 GB Low Power Dual Rank Kit	466440-B21
ML370 G5 Memory Board Kit	403766-B21

NOTE: 2 Memory Board required for support of 4:1 interleaving; 2 boards included on Performance models.

NOTE: Memory Option Kits include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, please visit:

<http://h18004.www1.hp.com/products/servers/platforms/energyefficient/>.

Storage

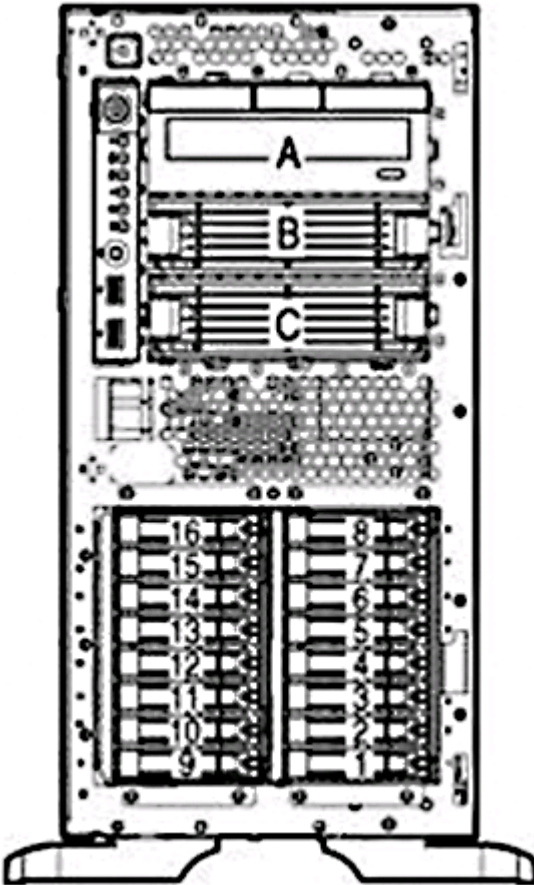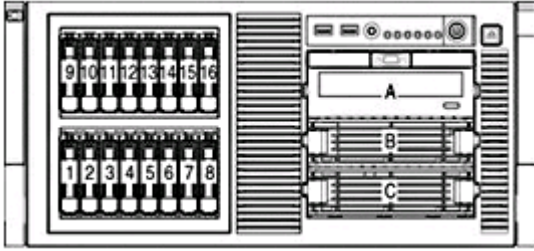

- A DVD-ROM Drive (Performance Models)/48x IDE CD-ROM Drive (Base and Entry Models)
- B, C DVD-ROM Drive (Performance Models)/48x IDE CD-ROM Drive (Base and Entry Models)
Optional media bay for internal tape drive
- 1-16 (16) hot-plug Serial-attached SCSI (SAS) drives supported
- A DVD-ROM Drive (Performance Models)/48x IDE CD-ROM Drive (Base and Entry Models)

- B, C DVD-ROM Drive (Performance Models)/48x IDE CD-ROM Drive (Base and Entry Models)
Optional media bay for internal tape drive

- 1-16 (16) hot-plug Serial-attached SCSI (SAS) drives supported

Drive Support

	Quantity Supported	Position Supported	Controller
Removable Media			
IDE CD-ROM Drive	Up to 2	A, B	Integrated IDE
DVD-ROM Drive Option Kit (optional)	Up to 2	A, B	Integrated IDE

Storage

Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Hot Plug SFF Enterprise (ENT) Drives

	Quantity Supported	Position Supported	Controller
300GB 6G SAS 10K DP	Up to 16	1-16	HP Smart Array E200/64MB Controller
300GB 3G SAS 10K DP			HP Smart Array E200/128 BBWC Controller
146GB 6G SAS 15K DP			HP Smart Array E500/256MB Controller
146GB 3G SAS 15K DP			HP Smart Array P400/256MB Controller
146GB 6G SAS 10K DP			HP Smart Array P400/512MB BBWC Controller
146GB 3G SAS 10K DP			HP Smart Array P600/256 BBWC Controller
72GB 6G SAS 15K DP			HP Smart Array P800/512 BBWC Controller
72GB 3G SAS 10K DP			
72GB 3G SAS 15K DP			

SAS Hot Plug SFF Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
500GB 6G SAS 7.2K DP	Up to 16	1-16	HP Smart Array E200/64MB Controller
			HP Smart Array E200/128 BBWC Controller
			HP Smart Array E500/256MB Controller
			HP Smart Array P400/256MB Controller
			HP Smart Array P400/512MB BBWC Controller
			HP Smart Array P600/256 BBWC Controller
			HP Smart Array P800/512 BBWC Controller

SATA Hot Plug SFF Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
500GB 3G SATA 7.2K	Up to 16	1-16	HP Smart Array E200/64 MB Controller
160GB 3G SATA 7.2K			HP Smart Array E200/128 BBWC Controller
			HP Smart Array E500/256MB Controller
			HP Smart Array P400/256 MB Controller
			HP Smart Array P400/512 MB BBWC Controller
			HP Smart Array P600/256 BBWC Controller
			HP Smart Array P800/512 BBWC Controller

SATA Hot Plug SFF Entry (ETY) Drives

	Quantity Supported	Position Supported	Controller
250GB 3G SATA 5.4K	Up to 16	1-16	HP 8 Internal Port SAS HBA with RAID
120GB 1.5G SATA 5.4K			NOTE: When using the 8 Internal Port SAS HBA with SATA Hard Drives, 1.5G SATA Hard Drives are required.
			NOTE: Transfer rate 1.5 Gb/s SATA, 3Gb/s SAS.
			HP Smart Array E200/64 MB Controller



Storage

HP Smart Array E200/128 BBWC Controller
 HP Smart Array E500/256MB Controller
 HP Smart Array P400/256 MB Controller
 HP Smart Array P400/512 MB BBWC Controller
 HP Smart Array P600/256 BBWC Controller
 HP Smart Array P800/512 BBWC Controller

SATA Hot Plug Midline (MDL) Solid State Drives

	Quantity Supported	Position Supported	Controller
60GB 3.0G SATA SSD 120GB 3.0G SATA SSD	Up to 16	1-16	HP 8 Internal Port SAS HBA with RAID NOTE: When using the 8 Internal Port SAS HBA with SATA Hard Drives, 1.5G SATA Hard Drives are required. NOTE: Transfer rate 1.5 Gb/s SATA, 3Gb/s SAS. HP Smart Array E200/64 MB Controller HP Smart Array E200/128 BBWC Controller HP Smart Array E500/256MB Controller HP Smart Array P400/256 MB Controller HP Smart Array P400/512 MB BBWC Controller HP Smart Array P600/256 BBWC Controller HP Smart Array P800/512 BBWC Controller

External Storage

	Quantity Supported	Position Supported	Host Controller or Adapter
50 Modular Smart Array	1 per external VHDCI SCSI connector	External	HP Smart Array P600/256 BBWC Controller
60 Modular Smart Array	Up to 8	External	HP Smart Array E500/256MB Controller
	Up to 4		HP Smart Array P600/256 BBWC Controller
	Up to 8		HP Smart Array P800/512 BBWC Controller
70 Modular Smart Array	Up to 4	External	HP Smart Array E500/256MB Controller
	Up to 2		HP Smart Array P600/256 BBWC Controller
	Up to 4		HP Smart Array P800/512 BBWC Controller

Tape and Disk-Based Backup

NOTE: For a complete listing of compatible tape and disk-based backup offerings, please visit: www.hp.com/go/connect

	Position Supported	Controller	Controller/HBA Option Kit Part Number
Internal USB Tape Drives DAT 40 USB DAT 72 USB DAT 160 USB	B,C	USB 2.0 Port	N/A

Storage

USB Tape Drives, External DAT 40 USB DAT 72 USB DAT 160 USB 1U Rack-Mount Kit	External	USB 2.0 Port	N/A
SCSI Tape Drives, Internal LTO-1 Ultrium 232 LTO-2 Ultrium 448 LTO-3 Ultrium 920 LTO-4 Ultrium 1760 DAT 40 DAT 72 DAT 160	B,C	HP SC11Xe Host Bus Adapter	412911-B21
SCSI Tape Drives, Internal LTO-3 Ultrium 960 LTO-4 Ultrium 1840	B+C	HP SC11Xe Host Bus Adapter	412911-B21
SCSI Tape Drives, External LTO-1 Ultrium 232 LTO-2 Ultrium 448 LTO-3 Ultrium 960 LTO-3 Ultrium 920 LTO-4 Ultrium 1760 LTO-4 Ultrium 1840 DAT 40 DAT 72 DAT 160 1U Rack-Mount Kit 3U Rack-Mount Kit	External	HP SC11Xe Host Bus Adapter	412911-B21
SAS Tape Drives, Internal DAT 160 SAS LTO-2 Ultrium 448 SAS LTO-3 Ultrium 920 SAS LTO-4 Ultrium 1760 SAS	B,C	HP SC44Ge Host Bus Adapter	416096-B21
SAS Tape Drives, Internal LTO-4 Ultrium 1840 SAS	B+C	HP SC44Ge Host Bus Adapter	416096-B21
SAS Tape Drives, External DAT 160 SAS LTO-2 Ultrium 448 SAS LTO-3 Ultrium 920 SAS LTO-4 Ultrium 1760 SAS LTO-4 Ultrium 1840 SAS	External	HP SC44Ge Host Bus Adapter	416096-B21

Storage

1U Rack-Mount
3U Rack-Mount

SCSI Tape Automation, External DAT 72x10 Autoloader 1/8 G2 Autoloader MSL2024 MSL4048 MSL8096 MSL6000	External	HP SC11Xe Host Bus Adapter HP U320e SCSI Host Bus Adapter NOTE: Recommended for MSL tape libraries.	412911-B21 AH627A
SAS Tape Automation, External 1/8 G2 Autoloader MSL2024 MSL4048 MSL8096	External	HP SC44Ge Host Bus Adapter	416096-B21
Fibre Tape Automation, External MSL2024 MSL4048 MSL8096 MSL6000	External	Please consult the EBS connectivity matrix at: http://www.hp.com/go/ebs for detailed connectivity information.	N/A
HP StorageWorks RDX Removable Disk Backup System, Internal RDX160 RDX320 RDX500	B,C	USB 2.0 Port	N/A
HP StorageWorks RDX Removable Disk Backup System, External RDX160 RDX320 RDX500	External	USB 2.0 Port	N/A
HP StorageWorks D2D Backup Systems D2D120 D2D130 D2D2500i D2D4000i	External	Embedded Network Controller	N/A

Power Specifications

Part Number	380622-001
Spare Kit	403781-001
Operational Input Voltage Range (V rms)	90 to 264
Frequency Range (Nominal) (Hz)	47 to 63 (50/60)

Nominal Input Voltage (Vrms)	100	120	208	220	230	240
Max Rated Output Wattage Rating	800	950	1000	1000	1000	1000
Nominal Input Current (A rms)	10.0	8.8	5.85	5.5	5.2	4.97
Max Rated Input Wattage Rating (Watts)	980	1035	1193	1186	1172	1169
Max. Rated VA (Volt-Amp)	1000	1056	1217	1210	1196	1193
Efficiency (%)	81.5	82	84	84	85	85.5
Power Factor	0.98	0.98	0.98	0.98	0.98	0.98
Leakage Current (mA)	0.44	0.52	0.91	0.96	1.00	1.04
Maximum Inrush Current (A peak)	30	30	30	30	30	30
Maximum Inrush Current duration (mS)	3	3	3	3	3	3

NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at url: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor

To drill down to calculators:

- Click on: "ProLiant Servers"
- Click on the Server of interest. Example: ML370 G5
- Click on: "Power Calculator" link. (You may need to scroll down to see it)

Power Cords (13 Cord Sets, 1.83m)	Power Cord Part Number
	121565-001

Technical Specifications

System Unit	Tower Dimensions (H x W x D) (with bezel)	18.38 x 8.63 x 28.5 in (46.67 x 21.92 x 72.39 cm)		
	Rack Dimensions (H x W x D) (with bezel)	8.63 x 17.5 x 26.5 in (21.92 x 44.45 x 67.31 cm)		
	Tower Weight (approximate)	Maximum	77 lbs (34.93 kg)	
		(two hard drives, power supply, and processor installed)		
		Minimum	68 lbs (30.84 kg)	
		(one hard drive, power supply, and processor installed)		
	Rack Weight (approximate)	Maximum	68 lbs (30.84 kg)	
		(two hard drives, power supply, and processor installed)		
		Minimum	59 lbs (26.76 kg)	
		(one hard drive, power supply, and processor installed)		
Input Requirements (per power supply)	Rated Line Voltage	90 - 132 VAC, 180 - 264 VAC		
	Rated Input Current	7.5A (at 100 VAC), 3.8A (at 200 VAC)		
	Rated Input Frequency	47 to 63 Hz		
	Rated Input Power	980W (at 100 VAC) 1035W (at 120 VAC) 1170W (at 240 VAC)		
BTU Rating	BTU/HR	3350 BTU/hr (at 100 VAC)		
		3530 BTU/hr (at 120 VAC)		
		3990 BTU/hr (at 240 VAC)		
Power Specifications	NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at url: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor			
	- Click on the system of interest. Example: ML370 G5 - Follow the instructions of the next screens			
Power Supply Output (per power supply)	Rated Steady-State Power	800 W (at 100 VAC) 850 W (at 120 VAC) 1000 W (at 200-240 VAC)		
		Maximum Peak Power	800 W (at 100 VAC) 850 W (at 120 VAC) 1000 W (at 200-240 VAC)	
System Inlet Temperature	Operating	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct		

Technical Specifications

		sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed.
		System performance may be reduced if operating with a fan fault or above 30°C (86°F).
Relative Humidity (non-condensing)	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
	Operating	10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.
Altitude	Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
	Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
Acoustic Noise	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
		Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).
	Idle	
	LWAd	6.2 B for Redundant 6.3 B for Non-Redundant
	LpAm	43 dBA for Redundant 44 dBA for Non-Redundant
	Operating	
	LWAd	6.2 B for Redundant 6.3 B for Non-Redundant
	LpAm	43 dBA for Redundant 44 dBA for Non-Redundant
Emissions Classification (EMC)	FCC Rating	Class B
	Normative Standards	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

Technical Specifications

Smart Array P400 Controller	Disk Drive and Enclosure Interface	3G SAS (Serial Attached SCSI) 1.5G SATA (Serial Advanced Technology Attachment)
	SAS Connectors	2 internal (SFF8484) x4 wide port connectors
	Cache Memory Speed	DDR2-533MHz with 40 or 72-bit wide bus provides up to 4.2 GB/s maximum bandwidth.
	Server Interface	x8 2.5G PCIe provides 2GB/s maximum bandwidth.
	SAS Speed	x8 3G SAS provides 2.4GB/s maximum bandwidth.
	Cache Memory	40-bit 256MB cache (72-bit 512MB module upgrades available); ECC protection, battery-backed, and transportable
	Logical Drives Supported	Up to 32 logical drives
	Maximum Logical Drive Capacity	3 TB (6 x 500GB)
	Host Memory Addressing	64-bit, supporting greater than 4GB server memory space
	RAID Support	RAID 6 with ADG (Advanced Data Guarding) requires Battery Backed Write Cache Upgrade
		RAID 5 (Distributed Data Guarding)
		RAID 1 +0 (Striping & Mirroring)
		RAID 0 (Striping)

Smart Array E200 Controller	Disk Drive and Enclosure Interface	3G SAS (Serial Attached SCSI) 1.5G SATA (Serial Advanced Technology Attachment)
	SAS Connectors	2 internal (SFF8484) x4 wide port connectors
	Cache Memory Speed	DDR1-266 MHz provides up to 4.2 GB/s maximum bandwidth.
	Server Interface	x8 2.5G PCIe provides 2GB/s maximum bandwidth.
	SAS Speed	x8 3G SAS provides 2.4GB/s maximum bandwidth.
	Cache Memory	40-bit 256MB cache (72-bit 512MB module upgrades available); ECC protection, battery-backed, and transportable
	Logical Drives Supported	Up to 32 logical drives
	Maximum Logical Drive Capacity	3 TB (6 x 500GB)
	Host Memory Addressing	64-bit, supporting greater than 4GB server memory space
	RAID Support	RAID 6 with ADG (Advanced Data Guarding) requires Battery Backed Write Cache Upgrade
		RAID 5 (Distributed Data Guarding)
		RAID 1, 1 +0 (Striping & Mirroring)
		RAID 0 (Striping)

Technical Specifications

Two embedded NC373i Multifunction Gigabit Server Adapters	Network Interface	10Base-T/100Base-TX/1000Base-TX	
	Compatibility	IEEE 802.3 10Base-T	
		IEEE 802.3ab 1000Base-T	
		IEEE 802.3u 100Base-TX	
	Data Transfer Method	PCI Express, four lanes (x4)	
	Network Transfer Rate	10Base-T (Half-Duplex)	10 Mb/s
		10Base-T (Full-Duplex)	20 Mb/s
		100Base-TX (Half-Duplex)	100 Mb/s
		100Base-TX (Full-Duplex)	200 Mb/s
		1000BaseTX (Half and Full-Duplex)	2000 Mb/s
Connector	RJ-45		
Cable Support	10Base-T	Categories 3, 4 or 5 UTP; up to 328 ft (100 m)	
	100Base-TX	Category 5 or higher UTP; up to 328 ft (100 m)	
	1000Base-TX	Category 5 or higher UTP; up to 328 ft (100 m)	

Environment-friendly Products and Approach **End-of-life Management and Recycling** Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2009 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.



