

### Overview

Designed for the new c-Class BladeSystem enclosure, the HP GbE2c Ethernet Blade Switch for c-Class BladeSystem (GbE2c) provides a full set of industry standard Gigabit Ethernet Layer 2 features, sixteen internal downlinks, five uplinks and two internal cross-connects in a single low cost blade solution. The GbE2c dramatically reduces cabling, power and cooling requirements compared to stand-alone switches, allowing you to realize the full cost saving capabilities of the HP c-Class BladeSystem.

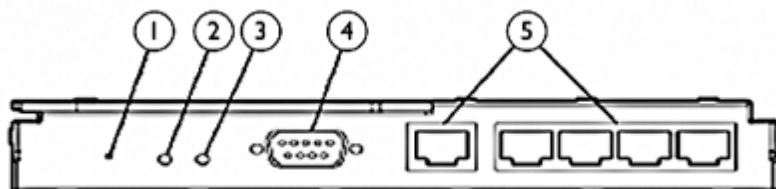


Figure 1 GbE2c Front Bezel

1. Reset Button
2. Health LED
3. UID LED
4. DB-9 Serial Management Port
5. RJ-45 1Gb Uplink Ports

### What's New

- Support for HP ProLiant BL680 G5 server blade
- Support for HP BladeSystem c3000 Enclosure

### At A Glance

#### Performance:

- Wire speed switching on all five 10/100/1000T uplink ports
- Wire speed switching on all sixteen 1Gb server ports
- 16:5 downlink to uplink bandwidth ratio
- Store and Forward Switching

#### Management:

- Offers simplified management
- Can be managed through CLI, HTTP, SNMP

#### Security:

- Secured access through SSH and HTTPS (SSL)
- Offers RADIUS Authentication
- Offers TACACS+ Authentication

### Models and Options

#### Models

HP GbE2c Ethernet Blade Switch for c-Class BladeSystem

410917-B21

#### Compatibility

##### HP ProLiant Servers

HP ProLiant BL460c  
HP ProLiant BL465c  
HP ProLiant BL480c  
HP ProLiant BL680c G5  
HP ProLiant BL685c  
HP ProLiant BL860c

##### ProLiant BL c-Class

##### Server Blade Enclosures

HP BladeSystem c3000 Enclosure  
HP BladeSystem c7000 Enclosure

#### Required Network Cabling

10Base-T	Categories 3, 4 or 5 UTP (100 meters) EIA/TIA-568 100-ohm STP (100 meters)
100Base-TX	Category 5 UTP (100 meters) EIA/TIA-568 100-ohm STP (100 meters)
1000Base-T	Category 5 UTP (100 meters) EIA/TIA-568 100-ohm STP (100 meters)

#### Service and Support

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Additional support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements.

The HP GbE2c Ethernet Blade Switch Limited Warranty includes 1 year Parts, 1 year Labor, 1-year on-site support.

Care Pack services provide a range of life cycle support options that let you choose the service levels that meet your business requirements, from basic to mission-critical.

A full range of HP Care Pack hardware and software services are available including:

- Installation and start up
- Education courses
- Extended onsite hardware coverage hours from same business day 13 hours, 5 day to 24 hours, 7 days call window with options including 4-hour response or 6-hour Call To Repair
- Comprehensive range of software technical support for Microsoft, Linux, ProLiant Essentials and VMware-based IT solutions helping to deliver high level of application availability. Response times range from 30 mins for critical problems to 2 hours.
- System Management, Performance Services and Mission Critical Support Solution

HP Care Pack services for the c7000 and c3000 Enclosure cover the enclosure, power supplies and fans. HP qualified rack options are covered by these services when installed within the same rack. HP supported c-Class enclosure devices including pass thru, Ethernet interconnect and virtual connect modules are also covered by the c7000 and c3000 enclosure Care Pack services.

**NOTE:** For more information on HP Care Pack services, contact any of our worldwide sales offices or

### *Models and Options*

resellers or visit our worldwide Web site on the internet at: <http://www.hp.com/hps/carepack>

**NOTE:** For more complete information on HP Services offerings, customers and resellers, please visit us at: <http://www.hp.com/hps>

**NOTE:** Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

### Related Options

#### Service and Support Offerings

**NOTE:** The HP Care Pack service part numbers below for ProLiant BL c-Class server blades, cover the server blade and all HP branded hardware options qualified for the server, purchased at the same time or afterwards, internal to the server.

##### Hardware Services On-site Service

4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic

4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic

6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic

##### Support Plus 24

Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic

**NOTE:** HP Care Pack services for the c7000 and c3000 Enclosure cover the enclosure, power supplies and fans. HP qualified rack options are covered by these services when installed within the same rack. HP supported c-Class enclosure devices including pass thru, Ethernet interconnect and virtual connect modules are also covered by the c7000 and c3000 enclosure Care Pack services.

**NOTE:** SAN/Fabric switches for the HP c-Class BladeSystem are not covered under the c7000 and c3000 enclosure Care Packs, SAN/Fabric switches carry separate Care Packs. SAN/Fabric Switch Care Pack service level support should always be uplifted to match existing storage or server service level.

##### Hardware Support Services On-site Service

4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic

UE477E

**NOTE:** Uplifts the Ethernet devices to the same level of warranty as the c-class enclosure

4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic

UE478E

4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic

UE479E

6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic

UE480E

##### Installation & Start-up Services

Hp BladeSystem c-Class Infrastructure Installation and Startup Service, Electronic

UE602E

HP BladeSystem Enhanced Network Installation and Startup Service, Electronic

UE603E

ProLiant BL c-Class Blade Server Hardware Installation, Electronic

UE493E

ProLiant BL c-Class Enclosure and Server Blade Hardware Installation, Electronic

UE494E

**NOTE:** For more information, customer/resellers can contact

<http://www.hp.com/services/bladessystemservices>

### Technical Specifications

Shipping Dimensions	Length	290 mm (11.42 in.)			
	Width	368 mm (14.49 in.)			
	Height	60 mm (2.36 in.)			
Shipping Weight		2.0 Kg (4.41 lbs)			
Product Specifications Hardware	Performance	10 Gbps external port bandwidth per BladeSystem enclosure (20 Gbps full duplex)			
		Forwarding rate 1.5 million pps per Gigabit port, (64-byte packets)			
	Non-blocking, full-wire speed for all connections Auto-MDI/MDIX, auto-negotiation and auto-sensing with full-duplex support.				
	Forwarding Mode	Store and forward			
	MAC Addresses	Supports 8K MAC addresses per GbE2c switch in a BladeSystem Enclosure			
	Forwarding Table Age Time (Maximum age)	1 to 1,000,000 seconds (default: 300 seconds)			
	Memory	128 MB Main, 16MB flash and 1MB packet buffer per interconnect switch			
	Connectors and Cabling	Connector:	5 RJ-45, 1 DB-9		
		Cable Support	FCC Class A		
			ICES-003 Class A		
AS/NZS 3548 Class A					
Network Transfer Rate	10 Base-T (half-duplex)	10 Mbps			
	10 Base-T (full-duplex)	20 Mbps			
	100 Base-TX (half-duplex)	100 Mbps			
	100 Base-TX (full-duplex)	200 Mbps			
	1000 Base-TX (half and full-duplex)	2000 Mbps			
Indicators	For the 5 front panel Ethernet ports, there are 2 LEDs per port.				
		<b>Speed LED</b>		<b>Link/Activity LED</b>	
		Off	10 Mbps	Solid Green	Link
		Green	100 Mbps	Blinking	Activity
		Amber	1 Gbps		
Dimensions	Length	10.5 in (267.7 mm)			
	Width	7.5 in (192.79 mm)			
	Height	1.1 in (27.94mm)			
Weight	1.8 Kg (3.97 lbs.)				
Environmental Ranges	Temperature Range	Operating 50° to 95° F (10° to 35° C)			
		Non-operating -40° to 158° F (-40° to 70° C)			
	Relative Humidity (non-condensing)	Operating 5% to 95%			
Power Specification	Power Requirements	12VDC: 2.0A, 25 W maximum (per interconnect switch)			

### Technical Specifications

Product Specifications Software	Security Features	<b>SSHv2, TACACS and TACACS+</b> VLANs can be configured to provide segregation for data - improving bandwidth, performance and limiting traffic to its designated domains. GbE2c also provides secured access through SSH v2, protecting against IP spoofing as well as DNS spoofing. GbE2c enables users to meet their security requirements by providing support of HTTPS, RADIUS and TACACS.
	Spanning Tree Features	<b>802.1d, 802.1w, 802.1s</b> GbE2c's industry standard Spanning Tree provides redundancy and the loop avoidance capabilities to keep the network not only up, but operating at peak performance Based on the industry standard 802.1w, GbE2c Rapid Spanning Tree Protocol (RSTP) offers fast convergence - reducing packet loss and downtime in high-availability and high resilient networks. GbE2c's industry-standard based RSTP offers instant failover to secondary links in an unlikely event of primary link failure. GbE2c also offers Multiple Spanning Tree Protocol (MSTP; 802.1s) for seamless integration into networks running 802.1s. Multiple Spanning Tree enables networks to utilize individual uplinks for separate VLANs thus improving the overall performance of the network. Up to 32 STG are supported
	Trunking Features	<b>802.3 ad</b> GbE2c reduces downtime in an unlikely event of link failure by supporting link aggregation protocol. GbE2c link aggregation is compatible with Cisco Etherchannel® thus providing seamless integration into Cisco® based networks.
	VLAN Features	In GbE2c up to 256 VLANs (802.1Q) can be configured to provide segregation for data - improving bandwidth, performance and limiting traffic to its designated domains.
	Management Features	GbE2c provides multiple easy-to-use configuration and management options. For compatibility, the GbE2c offers the same CLI as the GbE2. The GbE2c will also be software upgradeable to use an industry standard network administrator CLI (comparable to Cisco®) in a future release. GbE2c's Web-based management interface enables administrators to easily configure the most advanced features such as Rapid Spanning Tree, Uplink Failure Detection and SNMP management by pointing and clicking. GbE2c also enables sophisticated administrators to configure and manage the switch through SNMP. GbE2c provides full support for SNMP v1v2 and v3.

### Standards Support

- Compliance IEEE 802.3, 802.3u, 802.3ab, 802.1d, 802.1p, 802.3ac, 802.3ad (Static), and 802.1Q
- SNMP v1 (RFC 1157) and RMON v1 (RFC 1757) groups 1, 2, 3, and 9
- MIB-II (RFC 1213), Bridge MIB (RFC 1493), Interface Group MIB (RFC 2863), Ethernet MIB (RFC 1643), 802.1Q Extended Bridge MIB (RFC 2674), Entity MIB (RFC 2037), SNMP Trap Convention (RFC 1215), Bridge Trap (RFC 1493), Remote Monitoring Traps (RFC 1757), and HP Enterprise Switch MIBs and Environmental Traps
- IGMP v1 (RFC 1112), IGMP v2 (RFC 2236), SNTP (RFC 1361), Telnet (RFC 854), TFTP client (RFC 783), BootP client, (RFC 2132), and XModem

### Technical Specifications

<b>Safety and Compliance</b>	TUV to UL 60950-1, and CAN/CSA C22.2 No. 60950-1 and to EN 60950-1
<b>Safety Certifications</b>	CE Marking RoHS 5/6 compliant

---

<b>Electromagnetic Emissions</b>	FCC Part 15 Class A
<b>Certifications FCC Part 15 Class A</b>	EN 55022: 1998 (CISPR22) EN 55024: 1998 (CISPR24) VCCI Class A AS/NZS 3548 Class A CE CNS 13438 Class A MIC MIC

---

<b>Environment-friendly Products and Approach</b>	<b>End-of-life Management and Recycling</b>	Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a> . To recycle your product, please go to: <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.
---	---	---

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

---

© Copyright 2007 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows are US registered trademarks of Microsoft Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.